

TV VIF & SIF & DEFLECTION SYSTEM (IC FOR TV LARGE INTEGRATION)

The KA2915 is a monolithic integrated circuit containing all stages for the VIF, SIF and deflection functions of television receivers.


FUNCTIONS

- IF Amp.
- Video Amp.
- IF AGC
- Tuner AFT
- Sound DET. (FM DET.)
- Vertical trig.
- Vertical drive
- Horizontal drive
- Video DET. (AM DET.)
- Noise canceller
- Forward RF AGC
- SIF Amp.
- Sync separation
- Vertical oscillation
- Horizontal oscillation
- Horizontal AFC

FEATURES

- High integration technology makes possible the integration of video IF circuit a tuner AFC circuit a sound IF circuit a and deflection-jungle circuit a on a single chip.
- Supply voltage range: 8 ~ 12V (Typ. 10V).


28 DIP



ORDERING INFORMATION

| Device | Package | Operating Temperature |
|--------|---------|-----------------------|
| KA2915 | 28 DIP | -20 ~ +70°C |

BLOCK DIAGRAM

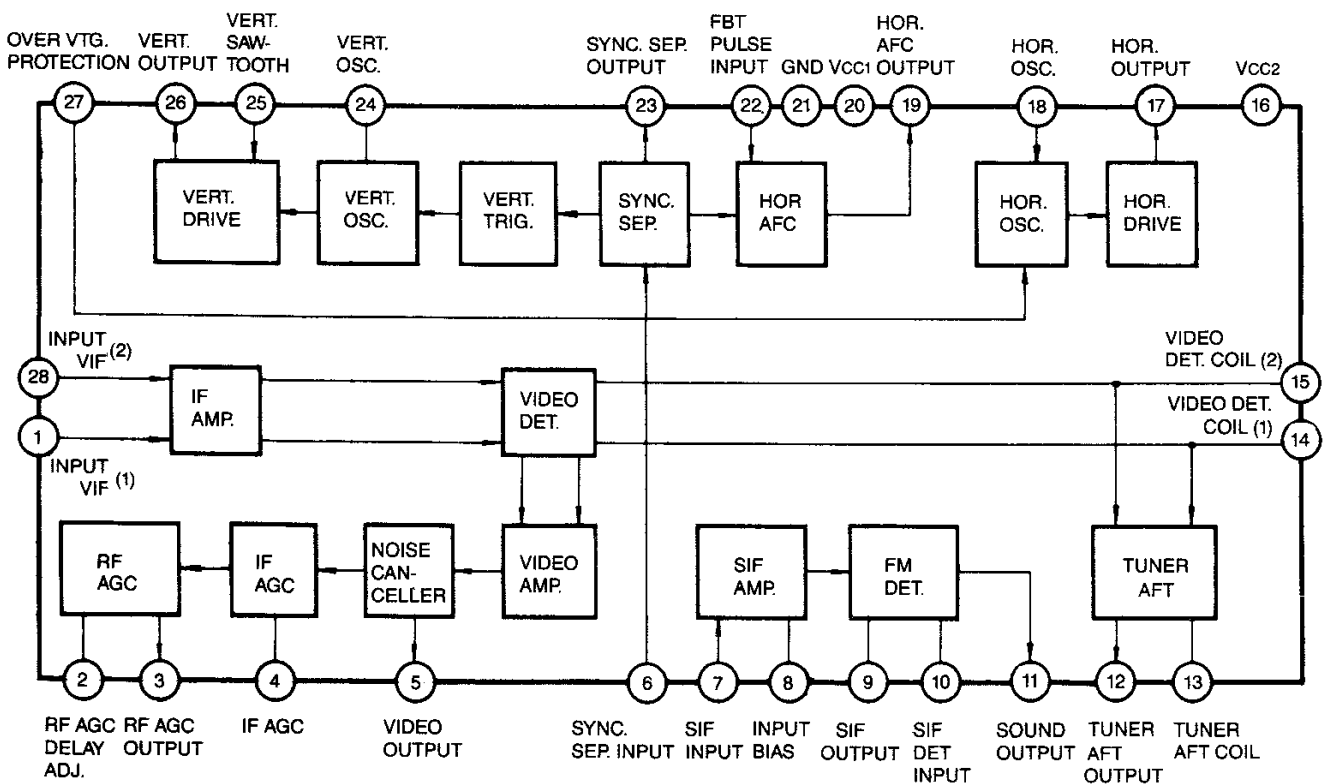

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

| Characteristic | Symbol | Value | | Unit |
|--|------------------------|-------------|------|------------------|
| Supply Voltage | $V_{CC} (V_{20-21})$ | 12 | | V |
| Supply Current | I_{20} | 85 | | mA |
| | I_{16} | 15 | | mA |
| Circuit Voltage | $V_{2, 3, 4, 24-21}$ | V_{20-21} | 0 | V |
| | V_{8-21} | 5.5 | 0 | V |
| | V_{13-21} | 4.2 | 0 | V |
| | V_{17-21} | V_{16-21} | 0 | V |
| Circuit Current | $I_{5, 6, 11, 23, 26}$ | +0.3 | -10 | mA (peak) |
| | I_{19} | +0.6 | -0.6 | mA (peak) |
| | I_{25} | +10 | 0 | mA (peak) |
| | I_{17} | +10 | -4 | mA (peak) |
| Power Dissipation ($T_a = 70^\circ\text{C}$) | P_D | 1100 | | mW |
| Operating Temperature | T_{OPR} | -20 ~ +70 | | $^\circ\text{C}$ |
| Storage Temperature | T_{STG} | -55 ~ +150 | | $^\circ\text{C}$ |

ELECTRICAL CHARACTERISTICS ($V_{CC1} = 10\text{V}$, $V_{CC} = 9.5\text{V}$, $T_a = 25^\circ\text{C}$)**Video Section**

| Characteristic | Symbol | Test Condition | Min | Typ | Max | Unit |
|------------------------------|--------------|---|-----|-----|-----|----------------|
| Video Det. Output | V_O | $m = 87.5\%$ | 2.0 | 2.3 | 2.6 | V_{p-p} |
| Input Sensitivity | S_{VI} | $V_O = -3\text{dB}$ | - | 50 | 55 | $\text{dB}\mu$ |
| Maximum Input | V_{MAX} | $V_O > +0\text{dB}$ | 105 | 110 | - | dB |
| SN Rating | S/N | $V_I = 80\text{dB}\mu$ | 51 | 56 | - | dB |
| Differential Gain | DG | $m = 87.5\%$ | - | 4 | 8 | % |
| Differential Phase | DP | $m = 87.5\%$ | - | 3 | 6 | deg |
| Video Freq. Characteristic | $G_{V(F)}$ | $V_O = -3\text{dB}$ | 4.5 | 6.0 | 8.0 | MHz |
| Sync. Peak Voltage | V_P | | 1.9 | 2.3 | 2.7 | V |
| Noise Inverter Output Level | V_{NT} | | 1.0 | 1.4 | 1.8 | V |
| Noise Inverter Capture Level | V_{NI} | | 3.0 | 4.0 | 5.0 | V |
| Sound IF Output | V_{SIF} | $P/S = 20\text{dB}$ | 100 | 104 | 107 | $\text{dB}\mu$ |
| Input Resistor | R_{INI} | $f = 45.75\text{MHz}$ | 0.8 | 1.0 | 1.2 | Kohm |
| Input Capacitcr | C_{ZNI} | $f = 45.75\text{MHz}$ | 3.0 | 3.4 | 3.8 | pF |
| Output Resistor | R_{O5} | $f = 500\text{kHz}$ | 30 | 50 | 150 | ohm |
| RF AGC Gain | $G_{RF AGC}$ | $f = 10\text{kHz}$, $V_4 = 5\text{mV}$ | 36 | 42 | 48 | dB |
| RF AGC Max. Voltage | $V_{3(MAX)}$ | | 8.2 | 8.8 | 9.4 | V |
| RF AGC Min. Voltage | $V_{3(MIN)}$ | | 3.6 | 4.2 | 4.8 | V |
| AFT Center Voltage | V_2 | | 4.0 | 5.4 | 6.0 | V |

Video Section (Continued)

| Characteristic | Symbol | Test Condition | Min | Typ | Max | Unit |
|----------------------------|------------------|-----------------------------|-----|-----|------|--------|
| AFT SW Operating Voltage | $V_{ART\ SW}$ | $R_S = 10K\Omega$ | 0.5 | 2.6 | 3.0 | V |
| AFT Maximum Output Voltage | $V_{12}\ (Max.)$ | | 8.5 | 9.6 | 10.0 | V |
| AFT Minimum Output Voltage | $V_2\ (Min.)$ | | 0 | 0.7 | 1.2 | V |
| Selection Sensitivity | μ | $R_L = 68K\Omega/82K\Omega$ | 30 | 50 | 90 | mV/kHz |

Sound Section

| Characteristic | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------|----------------|---|-----|-----|-----|------------|
| Sound Det. Output | V_O | $f_O = 4.5MHz, f_m = 400Hz$ $\Delta f = \pm 25kHz, V_i = 100mVrms$ | 200 | 300 | 440 | mVrms |
| Input Limit Voltage | $V_{i\ (LIM)}$ | $f = 4.5MHz, f_m = 400Hz$ $\Delta f = \pm 25kHz$ | — | 280 | 450 | $\mu Vrms$ |
| Total Harmonic Distortion | THD | $f_O = 4.5MHz, f_m = 400Hz$ $\Delta f = \pm 25kHz, V_i = 100mVrms$ | | 0.6 | 1.0 | % |
| AM Rejection Ratio | AMR | | 43 | 55 | — | dB |
| Input Impedance | R_{17} | $f = 4.5MHz$ | 6 | 20 | 100 | $K\Omega$ |
| | C_{17} | | 1.3 | 4.3 | 7.3 | pF |
| Detector Input Impedance | R_{D9} | $f = 4.5MHz$ | 2.0 | 3.0 | 4.0 | $K\Omega$ |
| | C_{D9} | | 2.1 | 5.1 | 8.1 | pF |
| | R_{D10} | | 50 | 200 | — | $K\Omega$ |
| | C_{D10} | | 2.9 | 3.4 | 3.9 | pF |


Deflection Section

| Characteristic | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------------|-------------|---|-----|-----|-----|---------|
| Sync Sep. Hori. Pulse Width (1) | t_{SYNC1} | Video Input 2.5V _{P-P} , APL=50%, $V_{CC1} = 10V$ | 4.8 | 5.1 | 5.4 | μs |
| Sync Sep. Hori. Pulse Width (2) | t_{SYNC2} | Video Input 1.0V _{P-P} , APL=50% $V_{CC1} = 10V$ | 4.9 | 5.2 | 5.5 | μs |
| Hori. AFC Hori. Pulse Width (1) | t_{SYNC3} | Video Input 2.5V _{P-P} , APL=50% $V_{CC1} = 10V$ | 4.8 | 5.1 | 5.4 | μs |
| Hori. AFC Hori. Pulse Width (2) | t_{SYNC4} | Video Input 1.0V _{P-P} , APL=50% $V_{CC1} = 10V$ | 4.9 | 5.2 | 5.5 | μs |
| Vert Osc, Start Supply Voltage | V_{FVOS} | $f_{VO} = 50 \sim 70Hz$ Output=0.7V _{P-P} | — | — | 6 | V |
| Vert. Free Running Frequency | f_{VO} | $R_{OSC(V)} = 31.5K\Omega$ | 57 | 60 | 63 | Hz |


Deflection Section (Continued)

| Characteristic | Symbol | Test Condition | Min | Typ | Max | Unit |
|------------------------------------|------------------------|--|------|-------|-------|---------------|
| Vert. OSC. Pulse Width | t_{VO} | $R_{OSC(V)} = 31.5K\Omega$ | 470 | 650 | 830 | μs |
| Vert. full in Range | $f_{V(PULL)}$ | $V_{CC1} = 12V, 8V$ $\Delta f_{VO}/V_{CC} = f_{VO(12V)} - f_{VO(8V)}$ | 0 | 1.0 | 1.3 | Hz |
| Vert. Full in Range | f_{PV} | Composite Signal Input $2V_{P.P}$ | — | 44 | 48 | Hz |
| Hori. OSC. Start Supply Voltage | V_{FHOS} | $f_{HO} = 10 \sim 20kHz$ Output = $1V_{P.P}$ Pin 16 Voltage | — | — | 5 | V |
| Hori. OSC. Freq. | f_{HO} | $R_{OSC(H)} = 21K\Omega$ | 15.0 | 15.75 | 16.25 | kHz |
| Hori. OSC. Pulse Width | t_{HO} | $R_{OSC(H)} = 21\Omega$ | 23 | 26 | 29 | μs |
| Hori. OSC. Freq. Voltage Dependent | $\Delta f_{HO}/V_{CC}$ | $V_{CC2} = 10V, 8V$ $\Delta f_{HO}/V_{CC} = f_{HO(10V)} - f_{HO(8V)}$ | 0 | 50 | 100 | Hz |
| Hori. OSC. Control Sensitivity | β | $\Delta I_1 \pm 100\mu A$ Input Variable OSC. Freq. Variable | 73 | 81 | 89 | Hz/ μA |
| Phase Det. Sensitivity | μP | TV Input $2V_{P.P}$, $R_{(U)} = 31.4K\Omega, \mu = V19 \times 10$ | 13.5 | 16.5 | 19.5 | $\mu A/\mu s$ |
| X-Ray Protector Operating Voltage | V_{27-21} | | 0.81 | 0.87 | 0.93 | V |
| X-Ray Protector Input Resistor | R_{27} | | 16 | 19 | 22.5 | K Ω |

TYPICAL APPLICATION CIRCUIT (12" or 14" B/W TV)

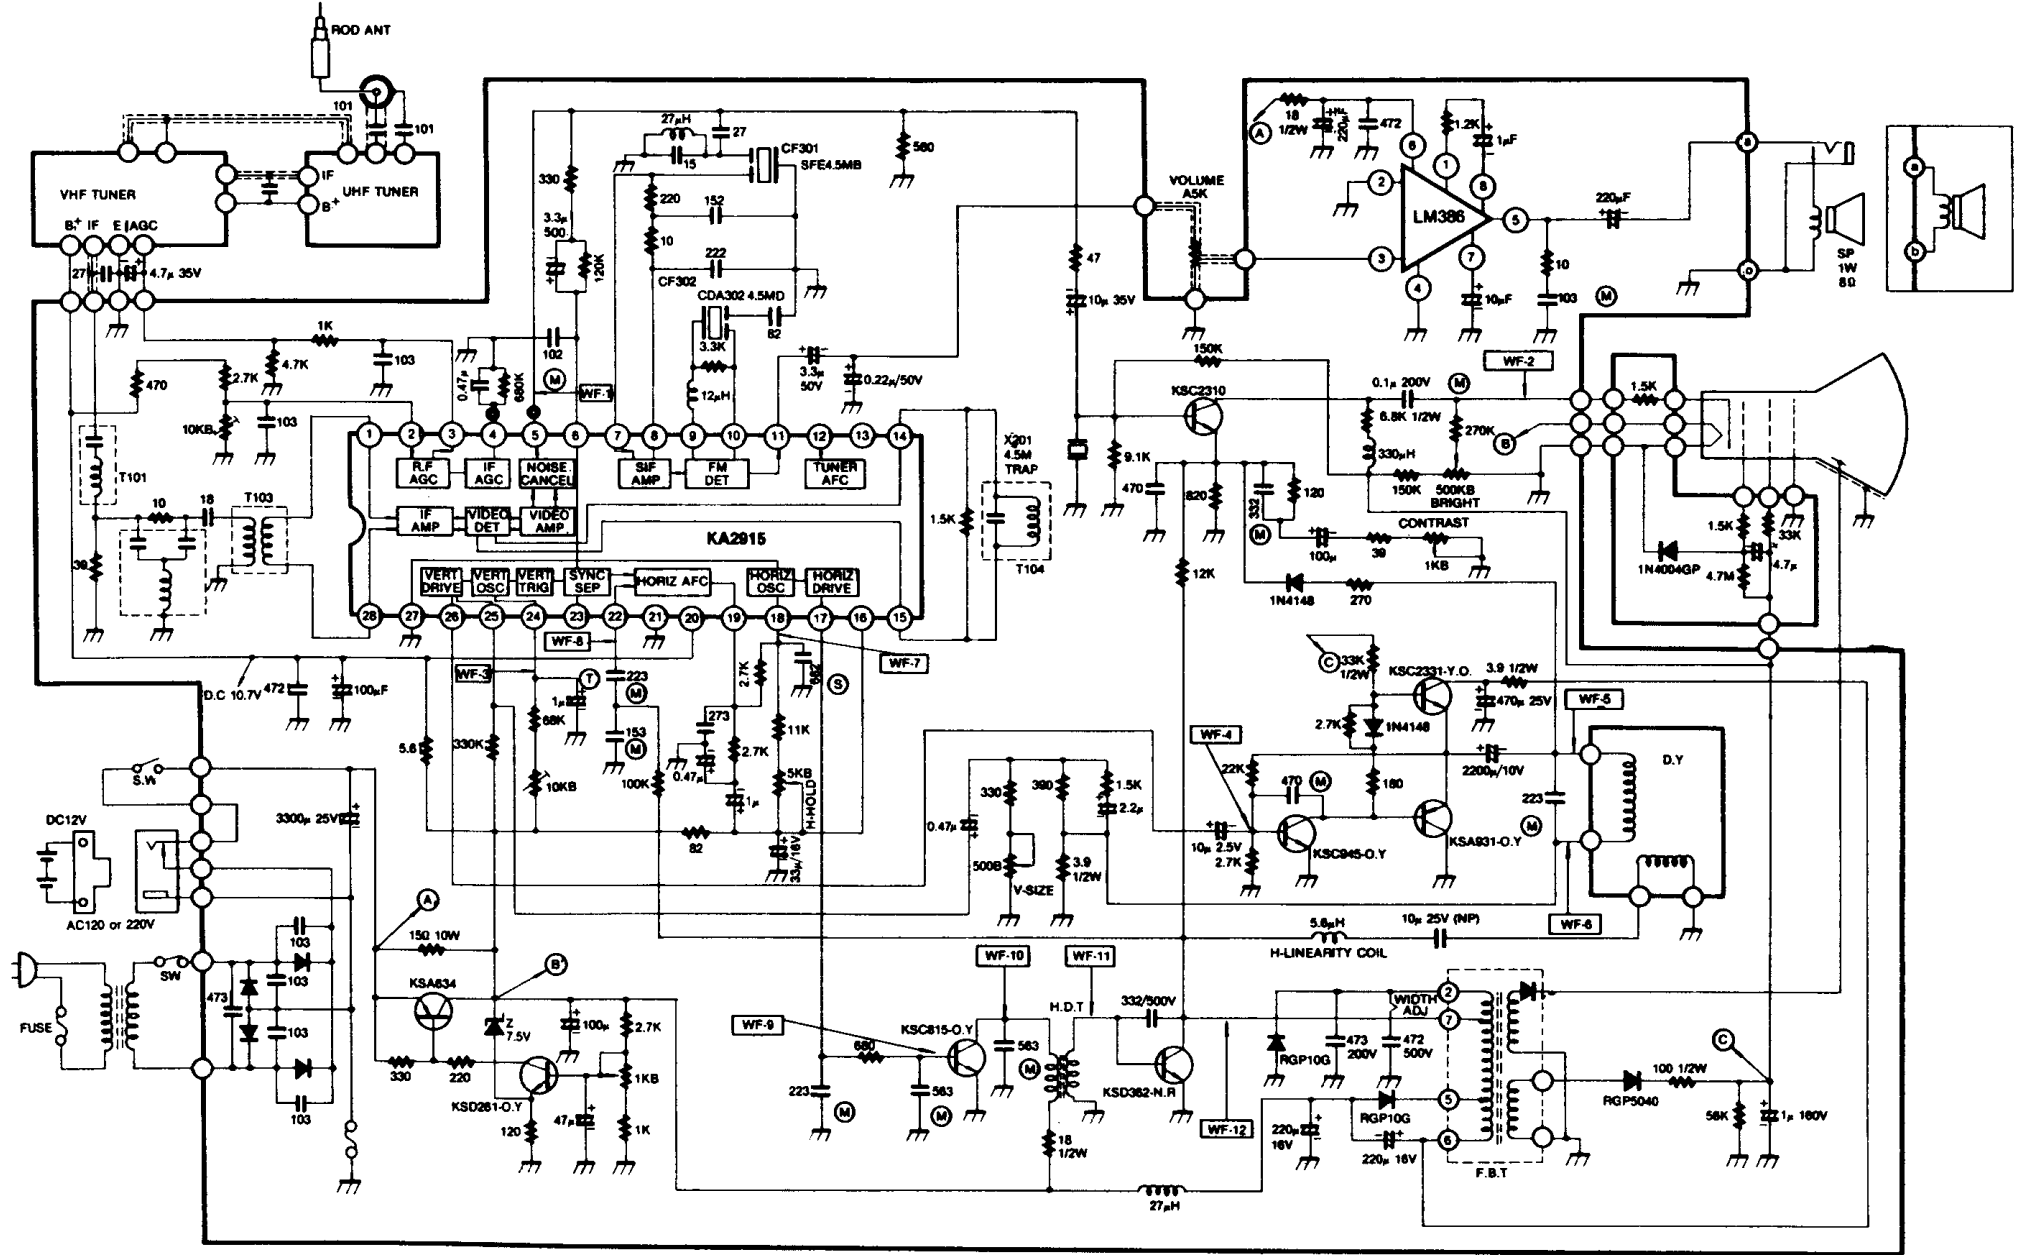

APPLICATION CIRCUIT (12" or 14" B/W TV) (Continued)

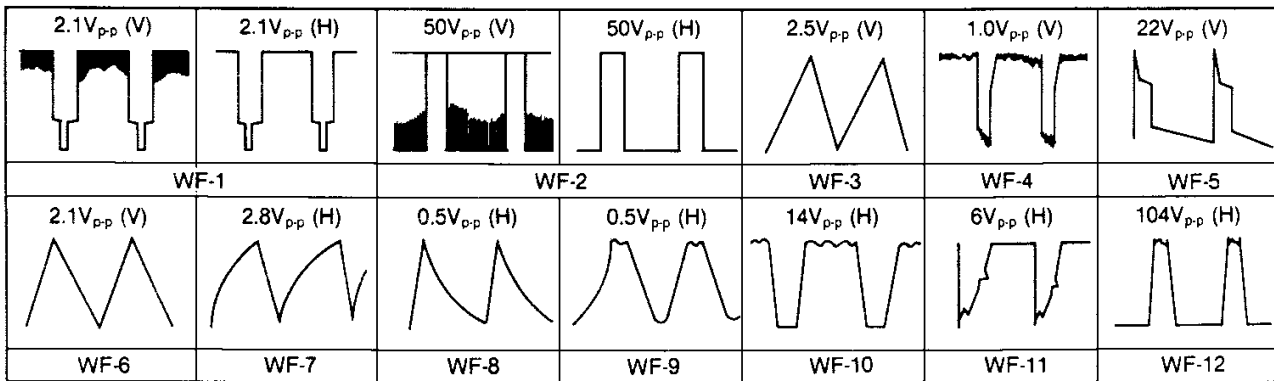

Change the specifications on the following table for your system

| Location | System | | | | |
|----------|------------|------------|------------|------------|------------|
| | B | D | I | IRELAND | AUSTRALIA |
| X201 | 5.5 | 6.5 | 6.0 | 6.0 | 5.5 |
| CF301 | SFE 5.5 | SFE 6.5 | SFE 6.0 | SFE 6.0 | SFE 5.5 |
| CF302 | CDA 5.5 | CDA 6.5 | CDA 6.0 | CDA 6.0 | CDA 5.5 |

NOTES: 1. All resistance values in ohm K = 1,000 M = 1,000,000.

2. All capacitors not noted in the schematic diagram are in pF the 3rd numeral of the capacitance value indicated 10^3 multiplier (EX: 683 → 68,000 pF).

3. Voltage readings taken with V.T.V.M. from the point indicated to chassis ground tuner on an unused channel at max other controls at normal line voltage 120 volts.


4. All waveforms measured with a strong signal input contrast set give a normal picture.

5. Voltage reading may vary 10%.

6. With this fundamental circuit diagram, some production changes may be made without revision of the overall diagram.

COIL SPECIFICATIONS

T104 Video Detector Coil



Bottom View

| C_o (pF) | f (MHz) | Q_o | Turns |
|------------|-----------|-------|--------|
| 4-6 | | 4-6 | 4-6 |
| 51 | 45.75 | 100 | 5 7/8t |

Wire: 0.3mm ϕ